



Настройка маршрутизатора D-link DIR-300nru H/W Ver.: B1-B4

Для настройки роутера необходимо перевести подключение по локальной сети в автоматическое получение ip-адреса. Как открыть Протокол интернета показано в документации по настройке подключения по локальной сети в соответствии с вашей операционной системой.

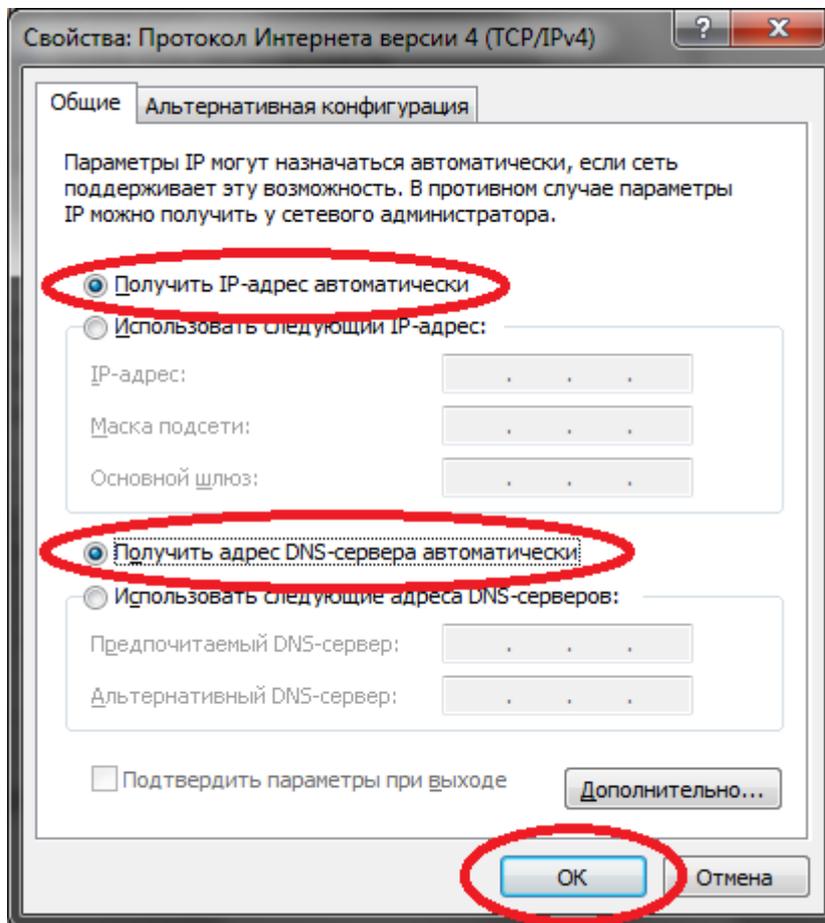

После чего открыв любой браузер ввести в строке адреса IP-адрес роутера(по умолчанию: 192.168.0.1) и нажмите "Enter", вы перейдете на страницу ввода логина и пароля(по умолчанию: логин admin, пароль оставляете пустым).

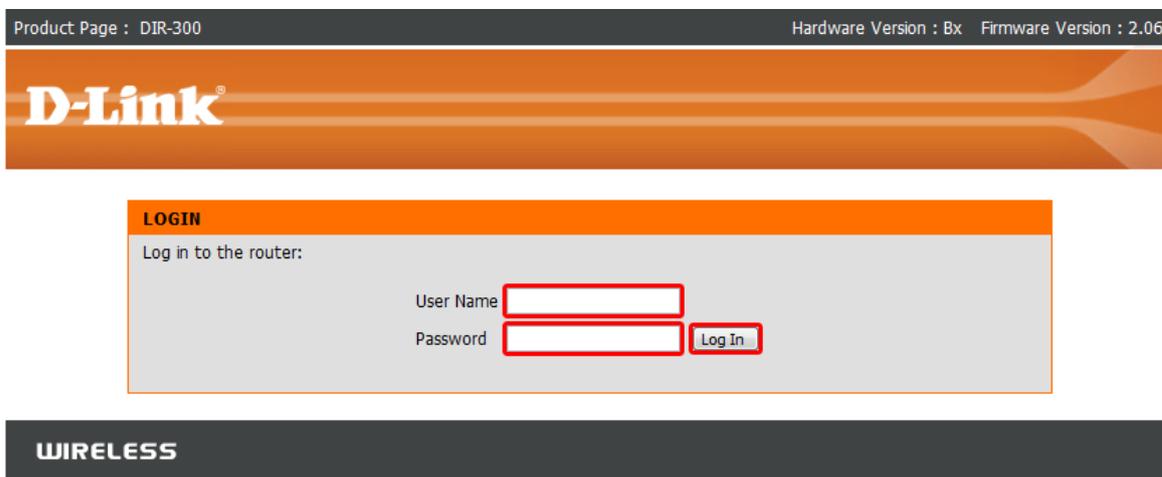

После входа открывается главная страница меню.
Нажмите кнопку "Manual Internet Connection Setup".

Product Page : DIR-300 Hardware Version : Bx Firmware Version : 2.06

D-Link

DIR-300	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
Internet Setup Wireless Setup LAN Setup Time and Date Parental Control Logout	<p>INTERNET CONNECTION</p> <p>If you are configuring the device for the first time, we recommend that you click on the Internet Connection Setup Wizard button and follow the instructions on the screen. If you wish to modify or configure the device settings manually, click the Manual Internet Connection Setup button.</p> <p>INTERNET CONNECTION SETUP WIZARD</p> <p>If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Router to the Internet, click on the button below.</p> <p style="text-align: center;">Internet Connection Setup Wizard</p> <p>Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.</p> <p>MANUAL INTERNET CONNECTION OPTIONS</p> <p>If you would like to configure the Internet settings of your new D-Link Router manually, then click on the button below.</p> <p style="text-align: center;">Manual Internet Connection Setup</p>	<p>Helpful Hints..</p> <ul style="list-style-type: none">• If you are new to networking and have never configured a router before, click on Internet Connection Setup Wizard and the router will guide you through a few simple steps to get your network up and running.• If you consider yourself an advanced user and have configured a router before, click Manual Internet Connection Setup to input all the settings manually.			

Надо выбрать тип сетевого подключения "Static IP", заполните ниже появившиеся поля(IP Адрес(IP-адрес), Subnet Mask(Маска), ISP Geteway Address(IP-шлюз), Primary DNS Address(DNS)).
Нажать "Save Settings".

Product Page : DIR-300 Hardware Version : Bx Firmware Version : 2.06

D-Link

DIR-300	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
Internet Setup Wireless Setup LAN Setup Time and Date Parental Control Logout	<p>INTERNET CONNECTION</p> <p>Use this section to configure your Internet Connection method. There are several connection methods to choose from: Static IP, DHCP, PPPoE, PPTP, L2TP, Russian PPTP(Dual Access) and Russian PPPoE(Dual Access). If you are unsure of your connection method, please contact your Internet Service Provider.</p> <p>Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.</p> <p style="text-align: center;">Save Settings Don't Save Settings</p> <p>ACCESS POINT MODE</p> <p>Use this to disable NAT on the router and turn it into an Access Point.</p> <p><input type="checkbox"/> Enable Access Point Mode</p> <p>INTERNET CONNECTION TYPE</p> <p>Choose the mode to be used by the router to connect to the Internet.</p> <p>My Internet Connection is : Dynamic IP (DHCP)</p> <p>DYNAMIC IP (DHCP) INTERNET CONNECTION TYPE</p> <p>Use this Internet connection type if your Internet Service Provider (ISP) didn't provide you with IP Address information and/or a username and password.</p> <p>Host Name : <input type="text" value="DIR-300"/></p> <p>MAC Address : <input type="text" value=""/> - <input type="text" value=""/> (optional) Clone MAC Address</p> <p>Primary DNS Address : <input type="text" value="91.215.188.254"/></p> <p>Secondary DNS Address : <input type="text" value=""/> (optional)</p>	<p>Helpful Hints..</p> <ul style="list-style-type: none">• Internet Connection: When configuring the router to access the Internet, be sure to choose the correct Internet Connection Type from the drop down menu. If you are unsure of which option to choose, please contact your Internet Service Provider (ISP).• Support: If you are having trouble accessing the Internet through the router, double check any settings you have entered on this page and verify them with your ISP if needed. <p>More...</p>			



DIR-300	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
<ul style="list-style-type: none"> Internet Setup Wireless Setup LAN Setup Time and Date Parental Control Logout 	<h3 style="text-align: center; background-color: #f4a460; margin: 0;">INTERNET CONNECTION</h3> <p>Use this section to configure your Internet Connection method. There are several connection methods to choose from: Static IP, DHCP, PPPoE, PPTP, L2TP, Russian PPTP(Dual Access) and Russian PPPoE(Dual Access). If you are unsure of your connection method, please contact your Internet Service Provider.</p> <p>Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.</p> <p style="text-align: center;"> <input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/> </p>				<p>Helpful Hints..</p> <ul style="list-style-type: none"> • Internet Connection: When configuring the router to access the Internet, be sure to choose the correct Internet Connection Type from the drop down menu. If you are unsure of which option to choose, please contact your Internet Service Provider (ISP). • Support: If you are having trouble accessing the Internet through the router, double check any settings you have entered on this page and verify them with your ISP if needed. <p>More...</p>
<h3 style="text-align: center; background-color: #333; color: white; margin: 0;">ACCESS POINT MODE</h3> <p>Use this to disable NAT on the router and turn it into an Access Point.</p> <p><input type="checkbox"/> Enable Access Point Mode</p>					
<h3 style="text-align: center; background-color: #333; color: white; margin: 0;">INTERNET CONNECTION TYPE</h3> <p>Choose the mode to be used by the router to connect to the Internet.</p> <p>My Internet Connection is : Static IP</p>					
<h3 style="text-align: center; background-color: #333; color: white; margin: 0;">DYNAMIC IP (DHCP) INT</h3> <p>Use this Internet connection IP Address information and/or</p> <p>Host Name : <input type="text" value="DIR-300"/></p> <p>MAC Address : <input type="text" value=""/> - <input type="text" value=""/> (optional)</p> <p style="text-align: center;"><input type="button" value="Clone MAC Address"/></p> <p>Primary DNS Address : <input type="text"/></p> <p>Secondary DNS Address : <input type="text"/> (optional)</p>					



DIR-300 //	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
-------------------	--------------	-----------------	--------------------	---------------	-------------

Internet Setup
Wireless Setup
LAN Setup
Time and Date
Parental Control
Logout

INTERNET CONNECTION

Use this section to configure your Internet Connection method. There are several connection methods to choose from: Static IP, DHCP, PPPoE, PPTP, L2TP, Russian PPTP(Dual Access) and Russian PPPoE(Dual Access). If you are unsure of your connection method, please contact your Internet Service Provider.

Note: If using the PPPoE option, you will need to remove or disable any PPPoE client software on your computers.

ACCESS POINT MODE

Use this to disable NAT on the router and turn it into an Access Point.

Enable Access Point Mode

INTERNET CONNECTION TYPE

Choose the mode to be used by the router to connect to the Internet.

My Internet Connection is :

STATIC IP ADDRESS INTERNET CONNECTION TYPE

Enter the static IP address information provided by your Internet Service Provider (ISP).

IP Address : (assigned by your ISP)

Subnet Mask :

ISP Gateway Address :

MAC Address : - - - - - (optional)

Primary DNS Address :

Secondary DNS Address : (optional)

MTU :

Helpful Hints..

- Internet Connection:** When configuring the router to access the Internet, be sure to choose the correct **Internet Connection Type** from the drop down menu. If you are unsure of which option to choose, please contact your **Internet Service Provider (ISP)**.
- Support:** If you are having trouble accessing the Internet through the router, double check any settings you have entered on this page and verify them with your ISP if needed.

[More...](#)

WIRELESS

Для настройки беспроводной сети нажмите слева в меню "Wireless Setup" и потом "Manual Wireless Connection Setup".

Product Page : DIR-300 Hardware Version : Bx Firmware Version : 2.06



DIR-300	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
Internet Setup Wireless Setup LAN Setup Time and Date Parental Control Logout	<p>WIRELESS CONNECTION</p> <p>There are 2 ways to setup your wireless connection. You can use the Wireless Connection Setup Wizard or you can manually configure the connection.</p> <p>Please note that changes made in this section will also need to be duplicated on your wireless clients and PCs.</p> <p>WIRELESS CONNECTION SETUP WIZARD</p> <p>If you would like to utilize our easy to use Web-based Wizard to assist you in connecting your new D-Link Systems Wireless Router to the Internet, click on the button below.</p> <p>Wireless Connection Setup Wizard</p> <p>Note: Before launching the wizard, please make sure you have followed all steps outlined in the Quick Installation Guide included in the package.</p> <p>MANUAL WIRELESS CONNECTION OPTIONS</p> <p>If you would like to configure the Internet settings of your new D-Link Router manually, then click on the button below.</p> <p>Manual Wireless Connection Setup</p>				<p>Helpful Hints..</p> <ul style="list-style-type: none">• If you are new to wireless networking and have never configured a wireless router before, click on Wireless Connection Setup Wizard and the router will guide you through a few simple steps to get your wireless network up and running.• If you consider yourself an advanced user and have configured a wireless router before, click Manual Wireless Connection Setup to input all the settings manually.

В пункте "Wireless Network Name" измените название сети.

В пункте "Security Mode" выберите тип шифрования "Enable WPA/WPA2 Wireless Security(enhanced)".

В появившемся пункте "Network Key" введите пароль вашей сети.

Нажмите "Save Settings".

Product Page : DIR-300 Hardware Version : Bx Firmware Version : 2.06

D-Link®

DIR-300	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
---------	-------	----------	-------------	--------	------

Internet Setup

Wireless Setup

LAN Setup

Time and Date

Parental Control

Logout

WIRELESS NETWORK

Use this section to configure the wireless settings for your D-Link router. Please note that changes made in this section may also need to be duplicated on your wireless client.

To protect your privacy you can configure wireless security features. This device supports three wireless security modes including: WEP, WPA and WPA2.

WI-FI PROTECTED SETUP (ALSO CALLED WCN 2.0 IN WINDOWS VISTA)

Enable :

Current PIN : **87328325**

Wi-Fi Protected Status : Enabled / Configured

WIRELESS NETWORK SETTINGS

Enable Wireless : Always

Wireless Network Name : (Also called the SSID)

Enable Auto Channel Selection :

Wireless Channel :

Transmission Rate : (Mbit/s)

WMM Enable : (Wireless QoS)

Enable Hidden Wireless : (Also called the SSID Broadcast)

WIRELESS SECURITY MODE

Security Mode :

Helpful Hints..

- Wi-Fi Protected Setup provides a more intuitive way of setting up wireless security between the router and the wireless client. Make sure the wireless card supports this feature or uses a certified Windows Vista driver in order to take advantage of this feature.
- Changing your Wireless Network Name is the first step in securing your wireless network. We recommend that you change it to a familiar name that does not contain any personal information.
- Enabling Hidden Mode is another way to secure your network. With this option enabled, no wireless clients will be able to see your wireless network when they perform a scan to see what's available. In order for your wireless devices to connect to your router, you will need to manually enter the Wireless Network Name on each device.
- If you have enabled Wireless Security, make sure you write down the WEP Key or Passphrase that you have configured. You will need to enter this information on any wireless device that you connect to your wireless network.

[More...](#)

WIRELESS

Copyright © 2004-2010 D-Link Systems, Inc.



DIR-300	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
Internet Setup	WIRELESS NETWORK				Helpful Hints.. <ul style="list-style-type: none"> • Wi-Fi Protected Setup provides a more intuitive way of setting up wireless security between the router and the wireless client. Make sure the wireless card supports this feature or uses a certified Windows Vista driver in order to take advantage of this feature. • Changing your Wireless Network Name is the first step in securing your wireless network. We recommend that you change it to a familiar name that does not contain any personal information. • Enabling Hidden Mode is another way to secure your network. With this option enabled, no wireless clients will be able to see your wireless network when they perform a scan to see what's available. In order for your wireless devices to connect to your router, you will need to manually enter the Wireless Network Name on each device. • If you have enabled Wireless Security, make sure you write down the WEP Key or Passphrase that you have configured. You will need to enter this information on any wireless device that you connect to your wireless network. More...
Wireless Setup	Use this section to configure the wireless settings for your D-Link router. Please note that changes made in this section may also need to be duplicated on your wireless client.				
LAN Setup	To protect your privacy you can configure wireless security features. This device supports three wireless security modes including: WEP, WPA and WPA2.				
Time and Date	<input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/>				
Parental Control	WI-FI PROTECTED SETUP (ALSO CALLED WCN 2.0 IN WINDOWS VISTA)				
Logout	Enable : <input checked="" type="checkbox"/> Current PIN : 87328325 <input type="button" value="Generate New PIN"/> <input type="button" value="Reset PIN to Default"/> Wi-Fi Protected Status : Enabled / Configured <input type="button" value="Reset to Unconfigured"/> <input type="button" value="Add Wireless Device with WPS"/>				
	WIRELESS NETWORK SETTINGS				
	Enable Wireless : <input checked="" type="checkbox"/> Always <input type="button" value="New Schedule"/> Wireless Network Name : <input type="text" value="dlink1"/> (Also called the SSID) Enable Auto Channel Selection : <input checked="" type="checkbox"/> Wireless Channel : <input type="text" value="4"/> Transmission Rate : <input type="text" value="Best (automatic)"/> (Mbit/s) WMM Enable : <input checked="" type="checkbox"/> (Wireless QoS) Enable Hidden Wireless : <input type="checkbox"/> (Also called the SSID Broadcast)				
	WIRELESS SECURITY MODE				
	Security Mode : <input type="text" value="Disable Wireless Security (not recommended)"/> <input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/> <input type="button" value="Enable WPA/WPA2 Wireless Security (enhanced)"/>				

WIRELESS



DIR-300	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
Internet Setup	WIRELESS NETWORK				Helpful Hints.. <ul style="list-style-type: none"> • Wi-Fi Protected Setup provides a more intuitive way of setting up wireless security between the router and the wireless client. Make sure the wireless card supports this feature or uses a certified Windows Vista driver in order to take advantage of this feature. • Changing your Wireless Network Name is the first step in securing your wireless network. We recommend that you change it to a familiar name that does not contain any personal information. • Enabling Hidden Mode is another way to secure your network. With this option enabled, no wireless clients will be able to see your wireless network when they perform a scan to see what's available. In order for your wireless devices to connect to your router, you will need to manually enter the Wireless Network Name on each device. • If you have enabled Wireless Security, make sure you write down the WEP Key or Passphrase that you have configured. You will need to enter this information on any wireless device that you connect to your wireless network. More...
Wireless Setup	Use this section to configure the wireless settings for your D-Link router. Please note that changes made in this section may also need to be duplicated on your wireless client.				
LAN Setup	To protect your privacy you can configure wireless security features. This device supports three wireless security modes including: WEP, WPA and WPA2.				
Time and Date	<input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/>				
Parental Control	WI-FI PROTECTED SETUP (ALSO CALLED WCN 2.0 IN WINDOWS VISTA)				
Logout	Enable : <input checked="" type="checkbox"/> Current PIN : 87328325 <input type="button" value="Generate New PIN"/> <input type="button" value="Reset PIN to Default"/> Wi-Fi Protected Status : Enabled / Configured <input type="button" value="Reset to Unconfigured"/> <input type="button" value="Add Wireless Device with WPS"/>				
	WIRELESS NETWORK SETTINGS				
	Enable Wireless : <input checked="" type="checkbox"/> Always <input type="button" value="New Schedule"/> Wireless Network Name : <input type="text" value="dlink1"/> (Also called the SSID) Enable Auto Channel Selection : <input checked="" type="checkbox"/> Wireless Channel : <input type="text" value="4"/> Transmission Rate : <input type="text" value="Best (automatic)"/> (Mbit/s) WMM Enable : <input checked="" type="checkbox"/> (Wireless QoS) Enable Hidden Wireless : <input type="checkbox"/> (Also called the SSID Broadcast)				
	WIRELESS SECURITY MODE				
	Security Mode : <input type="text" value="Enable WPA/WPA2 Wireless Security (enhanced)"/>				
	WPA/WPA2				
	WPA/WPA2 requires stations to use high grade encryption and authentication.				
	Cipher Type : <input type="text" value="AUTO(TKIP/AES)"/> PSK / EAP : <input type="text" value="PSK"/> Network Key : <input type="text" value=""/> (8~63 ASCII or 64 HEX)				
	<input type="button" value="Save Settings"/> <input type="button" value="Don't Save Settings"/>				

WIRELESS

В верхнем меню перейдите в раздел "Advanced", слева выберите "Advanced Network". Установите галочки в пунктах "Enable WAN Ping Response" и "Enable Multicast Streams". Нажмите "Save Settings".

Product Page : DIR-300 Hardware Version : Bx Firmware Version : 2.06



DIR-300 // SETUP **ADVANCED** MAINTENANCE STATUS HELP

Port Forwarding
Application Rules
QoS Engine
MAC Filter
Firewall & DMZ
Advanced Wireless
Advanced Network
Routing
Logout

ADVANCED NETWORK SETTINGS

These options are for users that wish to change the LAN settings. We do not recommend changing these settings from factory default. Changing these settings may affect the behavior of your network.

Save Settings Don't Save Settings

UPNP

Universal Plug and Play (UPnP) supports peer-to-peer Plug and Play functionality for network devices.

Enable UPnP :

WAN PING

If you enable this feature, the WAN port of your router will respond to ping requests from the Internet that are sent to the WAN IP Address.

Enable WAN Ping Response :

WAN PORT SPEED

10/100Mbps Auto

MULTICAST STREAMS

Enable Multicast Streams :
Wireless Enhance Mode :

Save Settings Don't Save Settings

Helpful Hints..

- For added security, it is recommended that you disable the **WAN Ping Respond** option. Ping is often used by malicious Internet users to locate active networks or PCs.
- If you are having trouble receiving video on demand type of service from the Internet, make sure the Multicast Stream option is enabled.

Для обновления прошивки в верхнем меню перейдите в раздел "Maintenance", затем "Firmware Update".
Прошивка скачивается с официального FTP сервера D-link. Выберите файл с прошивкой, и нажмите "Upload".

Product Page : DIR-300 Hardware Version : Bx Firmware Version : 2.06



DIR-300	SETUP	ADVANCED	MAINTENANCE	STATUS	HELP
Device Administration	FIRMWARE UPDATE <p>There may be new firmware for your DIR-300 to improve functionality and performance. Click here to check for an upgrade on our support site.</p> <p>To upgrade the firmware, locate the upgrade file on the local hard drive with the Browse button. Once you have found the file to be used, click the Upload button to start the firmware upgrade.</p> <p>The language pack allows you to change the language of the user interface on the DIR-300. We suggest that you upgrade your current language pack if you upgrade the firmware. This ensures that any changes in the firmware are displayed correctly.</p> <p>To upgrade the language pack, locate the upgrade file on the local hard drive with the Browse button. Once you have found the file to be used, click the Upload button to start the language pack upgrade.</p>				Helpful Hints..
Save and Restore	FIRMWARE INFORMATION <p>Current Firmware Version : 2.06 Current Firmware Date : Thu 15 Sep 2011</p> <p>Check Online Now for Latest Firmware Version : <input type="button" value="Check Now"/></p>				• Firmware Update are released periodically to improve the functionality of your router and also to add features. If you run into a problem with a specific feature of the router, check our support site by clicking on the Click here to check for an upgrade on our support site and see if an updated version of firmware is available for your router.
Firmware Update	FIRMWARE UPGRADE <p>Note: Some firmware upgrades reset the configuration options to the factory defaults. Before performing an upgrade, be sure to save the current configuration.</p> <p>To upgrade the firmware, your PC must have a wired connection to the router. Enter the name of the firmware upgrade file, and click on the Upload button.</p> <p>Upload : <input type="text" value="Выберите файл"/> Файл не выбран <input type="button" value="Upload"/></p>				
DDNS Setting	LANGUAGE PACK UPGRADE <p>Upload : <input type="text" value="Выберите файл"/> Файл не выбран <input type="button" value="Upload"/></p>				
System Check	WIRELESS				
Schedules	Copyright © 2004-2010 D-Link Systems, Inc.				
Log Settings					
Logout					